

Engineering Specification

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor's P.O. No. _____

Approval _____ Representative _____

Tag _____

LI-800 Lint Interceptor Specification


Watts LI-800 Series recessed or floor mounted epoxy coated steel lint interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), removable steel filter screens, and IPS threaded connections.



Suffix	Flow Rate Description	
03	30 GPM	<input type="checkbox"/>
07	70 GPM	<input type="checkbox"/>
10	100 GPM	<input type="checkbox"/>
20	200 GPM	<input type="checkbox"/>
30	300 GPM	<input type="checkbox"/>
40	400 GPM	<input type="checkbox"/>
50	500 GPM	<input type="checkbox"/>

Suffix	Options Description	
-E	Extension	<input type="checkbox"/>
-HD	Heavy Duty (10,000 lb.) Traffic Cover *	<input type="checkbox"/>
-NH	No Hub Connections	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>

*HD Option Requires Minimum 3" Extension

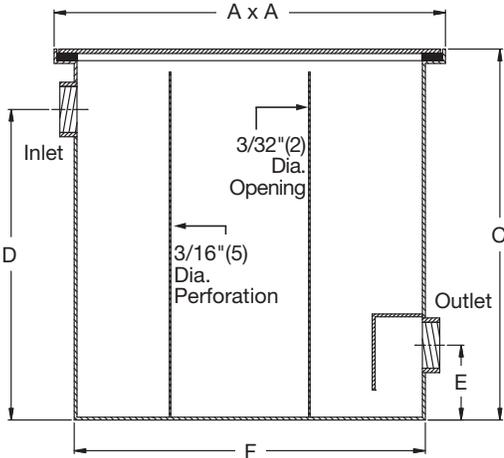

Model Number	Inlet/Outlet Size	Flow Rate GPM	Size/No. of Machines	A	C	D	E	F
LI-803	2"(51)	30	3	17"(432)	16 1/2"(419)	13 1/2"(343)	3 1/4"(83)	15 1/4"(387)
LI-807	3"(76)	70	7	25"(635)	20"(508)	16 1/2"(419)	3 1/4"(83)	23 1/4"(591)
LI-810	4"(102)	100	10	33"(838)	28"(711)	20 1/8"(511)	4"(102)	31 1/4"(794)
LI-820	4"(102)	200	20	40"(1016)	35"(889)	27 1/8"(689)	4"(102)	38 1/4"(972)
LI-830	6"(152)	300	30	45"(1143)	40"(1016)	28 1/8"(714)	5"(127)	43 1/4"(1099)
LI-840	6"(152)	400	40	48"(1219)	43"(1092)	31 1/8"(791)	5"(127)	46 1/4"(1175)
LI-850	6"(152)	500	50	52"(1321)	47"(1194)	35 1/8"(892)	5"(127)	50 1/4"(1276)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com
Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com