

## For Commercial Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

Tag \_\_\_\_\_

# CO-200-RX

## Floor Cleanout with Heavy Duty Round Top

### Specification

Watts CO-200-RX epoxy coated cast iron floor cleanout with 5-1/8"(130) round adjustable heavy duty ductile iron (standard) top, and no hub (MJ) connection.

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	<input type="checkbox"/>
3	3"(76) Pipe Size	<input type="checkbox"/>
4	4"(102) Pipe Size	<input type="checkbox"/>

Outlet Type (Select One)		
Suffix	Description	
NH	No Hub (MJ)	<input type="checkbox"/>
P	Push On	<input type="checkbox"/>

Options (Select One)		
Suffix	Description	
-6	Vandal Proof	<input type="checkbox"/>
-13	Galvanized Body	<input type="checkbox"/>
-34G	Gas Tight ABS Expansion Plug	<input type="checkbox"/>
-113M	Special Epoxy from 3M Range	<input type="checkbox"/>


Optional Body Material (NH Only)		
Suffix	Description	
-60	PVC Body w/Socket Outlet	<input type="checkbox"/>
-61	ABS Body w/Socket Outlet	<input type="checkbox"/>

Cover (Select One)		
Suffix	Description	
RX-1	5"(127) Dia. Nickel Bronze	<input type="checkbox"/>
RX-3	5"(127) Dia. Stainless Steel	<input type="checkbox"/>
RX-4	5"(127) Dia. Ductile Iron	<input type="checkbox"/>

Suffix	Load
	Rating
RX-1	HD
RX-3	HD
RX-4	HD

Chart A

Pipe Size	Std.	P	60/61
	No	Push	PVC/
	Hub	On	ABS
2"(51)	3"(76)	4"(102)	4"(102)
3"(76)	3"(76)	4"(102)	3-3/4"(95)
4"(102)	3"(76)	4"(102)	3-3/4"(95)

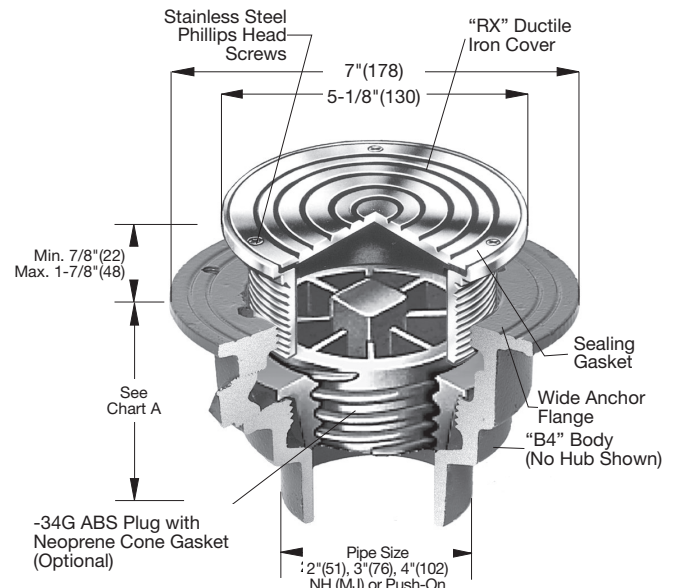

### NOTICE

The load classifications are in accordance with the American National Standards A112.21.1M ASME Ratings are as follows:  
HD - Safe Live Load 5000-7499 lbs. (2250-3375 kg)  
These categories are given as a guide only.  
Please consult factory.

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com

Canada: T: (888) 208-8927 • F: (888) 479-2887 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-CO-200-RX-CAN 2009

© 2020 Watts